
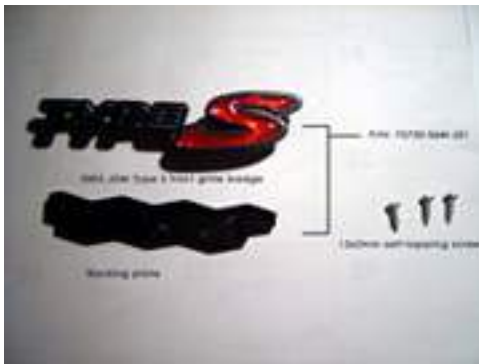


visualInstall Series

	Project	Application	Original Release
	'05+ JDM TYPE S FR BADGE	2005-2006 RSX	Jan 2005 Date vS-PDF Issued Oct 2006

PARTS LIST

1 JDM 2005 Type S front grille badge, part #: 75732-S6M-J01



TOOLS AND SUPPLIES REQUIRED

- 1 Flat-head screwdriver
- 1 Philips-head screwdriver
- 3 2x12mm self-tapping screws

INSTALLATION

NOTE:

- Difficulty Level: [03/10] easy
- Time required: 25 minutes

This guide is doubled up as a guide to install the JDM Type S front grille badge as well as an instruction on how to remove the front bumper. It is not necessary to remove the front bumper to install this mod.

I. FRONT BUMPER REMOVAL

1. First, pop your hood and locate six "A" clips on top of the front center bumper grille:



Using a flat-head screwdriver, insert it into the clips' indentation and turn clockwise or counterclockwise to pop the clips out of their retainers.

2. Next, go underneath the bumper, next to the right wheel-well and remove 2 self-tapping screws and another "A" clip

2a. Repeat for the opposite side. While still underneath the front bumper, remove four additional "A" clips.



3. By now, you should have removed a total of 12 "A" clips; 6 from underneath the bumper and 6 from atop of the center grille.

Take a Philips-head screwdriver and remove the screw that is securing the bumper onto the front fenders:



4. You are now able to remove the front bumper. Start by pulling the side of the bumper towards you. They are held onto their corresponding fenders via retainer clips. Pull until you pop them out of place:



5. As you pull along the side of the bumper, continue pulling the bumper aligned underneath the headlight towards you. You will need to use some force. Continue pulling until you pop them out of place.

Once you've gotten the sides out, pull the front center grille outward:



Lift the bumper up and towards you. If you have fog lights installed, now is the time to disconnect them:



II. INSTALLING THE TYPE S BADGE


1. Take a look at the area to the right of the Acura emblem on the front center grille. Count 7 "honeycombs" to the left, and 3 "honeycombs" down.



2. The yellow honeycomb is where you want to insert the first prong on the Type S badge (the prong closest to the "T" in Type S). Place the badge onto the grille and then go behind the grille to secure the backing plate:



3. Using the three 2x12mm self-tapping screws, secure the badge into the backing plate:

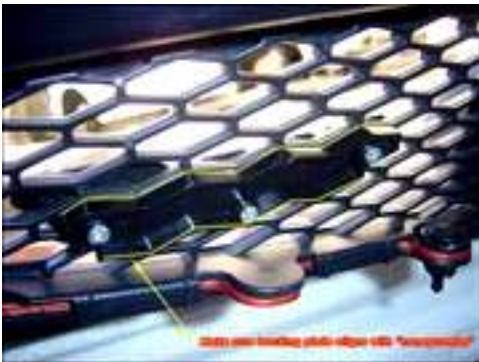

Make sure you secure the screws tightly, but not too tightly. Also, make sure the backing plate aligns with the honeycombs! If you overtighten the screws, you might break the badge. You want to secure it tight enough so that the badge does not move around as you drive. Once everything is in place, re-attach the bumper in reversal of removal. Be careful and ensure that all the clips go into the right location. Pay special attention to the bottom of the bumper when reinstalling it!

THE FINISHED PRODUCT

